Wood

www.cobsa.net/wood

since 1976

COBSA

Wood

5x40 cm - *2x16 in*

White

Wengue

Roble

Grey

Blue

10 graficas por color - 10 patterns each color

Pasta Blanca - *White Body*

Mate - *Matt*

Variación Moderada - *Moderate Variation*

Embalaje/*Packing*

		CAJA / BOX			**PALET** / PALLET			
Formato Size	Espesor Thickness	Piezas Pieces	Kg	m2	Cajas Boxes	Piezas Pieces	Kg	m2
5x40 cm	8 mm	52	7,6	0,52	140	7.280	1.074	72,80

since 1976

since 1976

Wood, WHITE

since 1976

Wood, BLUE

since 1976

Wood, GREY

Wood, WHITE + ROBLE

since 1976

Wood

RECOMENDACIONES / RECOMMENDATIONS

Colocación: Es necesario emplear un material de agarre y de rejuntado apropiado para cada producto
Hay que realizar un planteamiento inicial antes de empezar la colocación y tener en cuenta el tipo de junta, estructural, perimetral, dilatación y colocación que debe utilizarse para cada uso.
Aconsejamos que para obtener un resultado óptimo se debe utilizar una junta de 1,5 mm.
Tile Fixing: It is necessary to use an appropriate adhesive and grouting material for each product
An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use.
We advise that to obtain an optimal result a 1.5 mm joint should be used.

Mantenimiento y Limpieza: Una vez terminada la colocación se recomienda eliminar los restos de material adhesivo y rejuntado especifico para cada material siguiendo las instrucciones del fabricante de estos productos.
En la limpieza general no debe de emplearse detergentes en polvo y estropajos agresivos. Es suficiente limpiar los azulejos con una esponja, agua tibia y un jabón líquido neutro. Finalmente aclarar con agua limpia.
Maintenance and Cleaning
Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.
In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

SIZE: 5X40 cm / 2X16”	**THICKNESS (mm): 9mm**	**GROUP BIII: Wall Tile**

Size, Thickness, side straightness, flatness, orthogonality	**UNE-EN 14411**	**It accomplished all requirements**

Water absorption capacity	**EN ISO 10545-03**	**> 10%**
Flexion resistance	**EN ISO 10545-04**	**≥ 10 N/mm2**
Thermal shock resitance	**EN ISO 10545-09**	**It stand the test**
Cracking resistance	**EN ISO 10545-11**	**It stand the test**

Resistance to acids	**EN ISO 10545-13**	**GLA**
Resistance to alcalis	**EN ISO 19545-13**	**GLA**
Resistance to cleaning products	**EN ISO 10545-13**	**GA**
Resistance to chemical products in swimming pool water	**EN ISO 10545-13**	**GA**
Stains resistance	**EN ISO 10545-14**	**5**

since 1976

cobsa

COBSA FACTORY

Calle San Fernando 7,
12200 Onda, Castellón
Spain

Tel.: +34 964 57 78 78

a brand of

ALTTOGLASS
GROUP

HEADQUATERS

Pol. Ind. Casablanca s/n
12593 Moncofa, Castellón
Spain

Tel.: +34 964 57 78 78
alttoglass@alttoglass.com

USA BRANCH

1924 - 28 NW 82 Avenue
Doral FL. 33126
USA

Tel.: +1 305 - 718 8682
info.usa@alttoglass.com

www.cobsa.net/wood
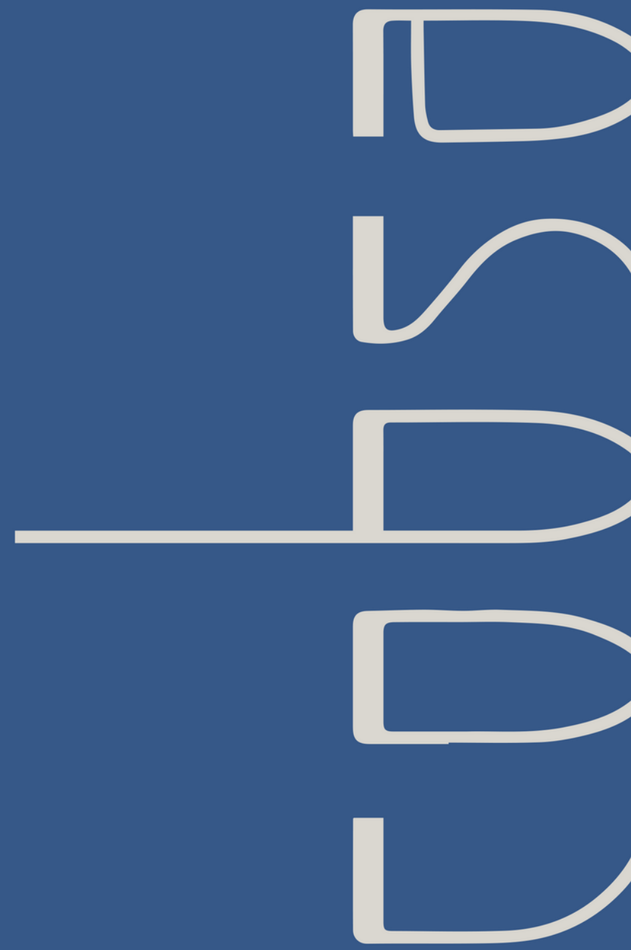
since 1976